
DELIPAT IT — ASSIGNMENT 3

Live Implementation & Feasibility Submission

Kaveri Infrasystems — Smart Corridor Package 2

Project SCP2 • Reporting date 30 September 2026

Submission	Assignment 3
Repository	zahir2003/delipat-assignment-three-kaveri
Verified commit	94da43c
Automated tests	22 / 22 passed
Evidence	12 / 12 screenshots

Submission scope

Working implementation, project-control evidence, AI evaluation, ClickUp verification and F1–F13 feasibility assessment.

This submission implements the four required deterministic programs, documents the ClickUp control model, evaluates local Ollama against hand-labelled execution remarks, verifies ClickUp AI answers against computed project figures, and records the feasibility of F1–F13.

Area	Implementation / Evidence
Schedule importer	Idempotent XER import with WBS/activity relationships
RA bill engine	RA-04 September 2026 calculation and ClickUp record
Approval router	Value-based approval, escalation and anti-splitting
Cashflow forecaster	October–December 2026 controlled forecast
Local AI	Ollama classification over all 26 execution remarks
ClickUp AI	Six required project questions verified
Weekly report	Deterministic numbers with local-AI narrative
Feasibility	F1–F13 bucketed across the four required feasibility buckets
Evidence	12 screenshots plus public GitHub repository

Controlled-data principle

Contract values, rates, project calculations and management numbers are generated from controlled project data. External AI is not used for calculations. The local Ollama narrative layer is restricted to supplied deterministic report values.

Build date	27 September 2026
Build time	20:55:37 IST
Repository	zahir2003/delipat-assignment-three-kaveri
Current verified commit	94da43c
Automated tests	22 / 22 passed

The dated build log documents the implementation verification performed on 27 September 2026. The repository was subsequently finalized with documentation and evidence changes and verified at commit 94da43c.

Implemented components

- Local Ollama execution-log extraction.
- Idempotent Primavera P6 XER schedule importer.
- RA-04 bill engine and ClickUp billing record.
- Purchase approval router with leave escalation and anti-splitting.
- WBS-based cashflow forecaster.
- Weekly management report.
- Local Ollama management narrative.
- ClickUp schedule and RA billing evidence.
- F1–F13 feasibility assessment.
- Automated test suite and evidence screenshots.

RA-04 is calculated from the controlled contract, cumulative billing, September measurements, production/QC records and the stated mobilisation-recovery policy.

BOQ	Billable Qty	Rate	Gross	Control
B02	1,500 m	INR 1,150.00	INR 1,725,000.00	300 m failed QC excluded
B03	24 nos	INR 38,500.00	INR 924,000.00	2 nos failed QC excluded
B04	4.9 km	INR 185,000.00	INR 906,500.00	0.3 km disputed
B05	700 m	INR 220.00	INR 154,000.00	250 m variation
B06	12 nos	INR 14,500.00	INR 174,000.00	2 disputed excluded

RA-04 calculation	Amount
Gross value	INR 3,883,500.00
GST — 18%	INR 699,030.00
Retention — 5%	INR 194,175.00
Mobilisation advance	INR 1,043,200.00
Previous recovery	INR 718,550.00
RA-04 advance recovery	INR 324,650.00
Net payable	INR 4,063,705.00

Billing control

Disputed quantities are excluded from billing. QC-failed quantities are not billable. B05's 250 m above the contract quantity is recorded as a variation rather than silently billed at the contract rate.

The forecast uses remaining BOQ quantities, the controlled schedule forecast and the stated billing/payment timing.

BOQ	Remaining	Finish	Gross	Payment
B02	1,600 m	Oct 2026	INR 1,840,000.00	05 Dec 2026
B03	30 nos	Oct 2026	INR 1,155,000.00	05 Dec 2026
B04	8.9 km	Oct 2026	INR 1,646,500.00	05 Dec 2026
B05	700 m	Oct 2026	INR 154,000.00	05 Dec 2026
B06	42 nos	Oct 2026	INR 609,000.00	05 Dec 2026
B07	1 LS	Nov 2026	INR 450,000.00	04 Jan 2027

Month	Forecast cash inflow
October 2026	INR 2,385,500.00
November 2026	INR 4,063,705.00
December 2026	INR 6,107,085.00

Forecast control

Retention release is outside the forecast. No future mobilisation advance recovery is assumed in the forecast.

Control	Result / Evidence
Traceability	WBS → execution record → BOQ mapping supported.
Disputed quantity	Measured, certified and disputed quantities are separated.
QC exclusion	QC-failed fabrication is excluded from billable quantity.
Certification	Certification requires an inspection certificate.
Invalid WBS	Invalid WBS activity is flagged and never remapped.
Capacity	EX-908 at 4,200 m exceeds the 800 m/day maximum and is flagged.
B04 variance	8.98 km logged vs 5.2 km measured; no invented explanation.
B05 variation	250 m certified above contract quantity recorded as variation.
Approval escalation	PR-104 and PR-108 escalate because assigned approver is unavailable.
Anti-splitting	PR-105 and PR-106 trigger aggregation rule.

Approval routing

Request	Routed approver
PR-101	Arjun
PR-102	Arjun
PR-103	Neha
PR-104	Vikram — escalation due to Neha leave
PR-105	Vikram
PR-106	Vikram — aggregate value rule
PR-107	Suresh
PR-108	Vikram — escalation due to unavailable approver
PR-109	Neha

Local Ollama execution-log extraction

All 26 execution remarks were processed using local Ollama. The hand-labelled reference set was compared field-by-field with the model output.

Field	Correct	Total	Accuracy
Delay category	24	26	92.31%
Delay hours	26	26	100.00%

Observed model errors

EX-915 was classified as none instead of inspection; EX-925 was classified as labour instead of none.

Control: The extraction prompt prohibits inventing delay hours. Unstated values remain "not stated".

ClickUp AI head-to-head verification

Test	Result
Required project questions	6 / 6 correct
Numeric questions included	At least 4
Contract value	INR 13,040,000 — verified
RA-04 totals	Verified against deterministic calculation
Cashflow Oct/Nov/Dec	Verified against deterministic forecast
B02 quantity/rate	1,500 m / INR 1,150 — verified
B04 measured/certified/disputed	5.2 / 4.9 / 0.3 km — verified

ClickUp AI observation

Global Brain indexing was less reliable for finding some project records, while task-level Brain queries returned the required answers correctly.

7 F1–F13 Feasibility Verdicts

The feasibility assessment uses the four required buckets: NATIVE, CONFIGURATION, CUSTOM BUILD and NOT POSSIBLE.

Requirement	Verdict
F1 — Traceability	CUSTOM BUILD
F2 — Certified / disputed separation	CUSTOM BUILD
F3 — Monthly progress + milestone billing	CUSTOM BUILD
F4 — Finance notification	CUSTOM BUILD
F5 — Purchase approval limits	CUSTOM BUILD
F6 — Approval rerouting	CUSTOM BUILD
F7 — Certification control	CUSTOM BUILD
F8 — WBS-based forecast	CUSTOM BUILD
F9 — P6 / Microsoft Project import	CUSTOM BUILD
F10 — SMS alerts	CONFIGURATION
F11 — Private-network hosting	NOT POSSIBLE
F12 — Full Excel export	CONFIGURATION
F13 — AI management reports	CUSTOM BUILD

Bucket	Count
NATIVE	0
CONFIGURATION	2
CUSTOM BUILD	10
NOT POSSIBLE	1

Key feasibility finding

F11 is classified as NOT POSSIBLE because ClickUp is a SaaS platform hosted on ClickUp's infrastructure rather than being deployable entirely inside the client's private network.

For non-NATIVE requirements, the feasibility document records the required workaround or build approach, limitations and client-facing expectation.

Data handling

- Contract values and project rates remain inside the controlled project environment.
- Local Ollama is accessed through 127.0.0.1:11434.
- No external AI service is used for deterministic project calculations.
- AI narrative receives already-computed report values and is instructed not to alter or invent numbers.
- Secrets are excluded from Git through .gitignore.
- Generated artifacts and local data are excluded where required.

Verification	Result
Automated tests	22 / 22 passed
Git working tree check	git diff --check clean
XER importer	Idempotent
RA-04 calculation	Verified
Cashflow forecast	Verified
Purchase approval router	Verified
Local Ollama	26 / 26 remarks processed
Local Ollama category accuracy	92.31%
Local Ollama hours accuracy	100%
ClickUp AI	6 / 6 required questions correct
Evidence screenshots	12 / 12
Repository	Public GitHub repository

Submission checklist

The PDF covers the dated build evidence, feasibility verdicts, AI accuracy, RA-04 bill, cashflow forecast and all 12 evidence screenshots. The remaining submission actions are the 10-minute voice-and-screen demonstration and the required ClickUp guest invitation to rajesh@delipat.com.

The following 12 evidence items document the implementation, ClickUp configuration, calculations, AI evaluation, testing, repository and feasibility assessment.

Kaveri Infrasytems — Delipat Assignment 3

Search Ctrl K | Ask, Build

Home | WBS and Task Count Inquiry | + Ask, Build, Create

Planner | Super Agents | Brain | + New Super Agent

Teams | Spaces | +

- All Tasks - Kaveri Infrasytems ...
- Space** | +
- Schedule & WBS** | 11
- RA Billing | 2

+ New Space

Channels

- # Welcome
- # General - Kaveri Infrasytems ...
- + Add Channel

Direct Messages

- Sk Mahiduzzaman — You
- + New message

Upgrade

Space / Schedule & WBS

Add Channel | List | Board | + View

Group: Status | Subtasks | Columns

Filter | Closed | Assignee | S | Customize | Add Task

TO DO 11

Name	Assignee	Due date	Priority
WBS — Smart Corridor Package 2			
WBS — Design			
WBS — Design and Drawings			
WBS — Fabrication and Supply			
WBS — Cable Tray Fabrication and Supply			
WBS — CCTV Pole Fabrication and Supply			
WBS — Installation			
WBS — OFC Laying			
WBS — Cable Tray Installation			
WBS — CCTV Pole Erection			
WBS — Testing and Commissioning			

+ Add Task

Evidence 01/12 • screenshots/01_clickup_workspace_schedule_wbs.png

The screenshot shows the Kaveri Infrasystems workspace for 'Delipat Assignment 3'. The left sidebar contains navigation options: Home, Planner, AI, Teams, Dashboard, and More. The main area displays a list of tasks under the 'TO DO' section. The tasks are organized into a hierarchy starting with 'WBS' (Work Breakdown Structure) items. The table shows the following tasks:

Name	Assignee	Due date	Priority
WBS — Smart Corridor Package 2			
WBS — Design			
WBS — Design and Drawings			
A1000 — Detailed design submission		6/20/26	
A1010 — Design approval by client		7/5/26	
WBS — Fabrication and Supply			
WBS — Cable Tray Fabrication and Supply			
A2000 — Fabricate GI cable trays		Fri	
A2020 — Supply cable trays to site		10/12/26	
WBS — CCTV Pole Fabrication and Supply			
A2010 — Fabricate CCTV poles		Fri	
A2030 — Supply CCTV poles to site		10/5/26	
WBS — Installation			
WBS — OFC Laying			
A3000 — OFC laying Section A		9/2/26	
A3010 — OFC laying Section B		10/17/26	
WBS — Cable Tray Installation			
A3020 — Cable tray installation		10/22/26	
WBS — CCTV Pole Erection			
A3030 — CCTV pole erection incl. foundation		10/15/26	
WBS — Testing and Commissioning			
A4000 — Testing		11/6/26	
A4010 — Commissioning and handover		11/7/26	

Evidence 02/12 • screenshots/02_clickup_imported_activities.png

The screenshot displays the ClickUp interface for a workspace named 'Kaveri Infrasystems'. The left sidebar contains navigation options: Home, Planner, AI, Teams, Dashboard, and More. The main area shows a 'Space / RA Billing' view with a 'List' tab selected. The interface includes various filters and controls at the top and bottom.

Space / RA Billing

TO DO 2

Name	Assignee	Due date	Priority
RA-04 — September 2026			
Cash-flow Forecast - Oct-Dec 2026			

Filters: Filter, Closed, Assignee, S, Customize, Add Task

Evidence 03/12 • screenshots/03_ra_billing_list.png

The screenshot shows a task management application interface. At the top, the task title is "RA-04 — September 2026". Below the title, there is a search bar and a status filter set to "TO DO". The task details include a source key "ra:RA-04:2026-09", a project name "Kaveri Infrasytems — SCP2", and a work month of "September 2026".

The main content area is divided into sections: "COMMERCIAL SUMMARY", "ADVANCE", "BILL LINES", and "EXCEPTIONS".

COMMERCIAL SUMMARY

- Contract value: ₹13,040,000.00
- Gross value: ₹3,883,500.00
- GST @ 18%: ₹699,030.00
- Retention @ 5%: ₹194,175.00
- Advance recovery: ₹324,650.00
- Net payable: ₹4,063,705.00

ADVANCE

- Mobilisation advance @ 8%: ₹1,043,200.00
- Previous advance recovered: ₹718,550.00
- Outstanding before RA-04: ₹324,650.00

BILL LINES

- B01 | Detailed engineering and design | WBS/activity=A1010 | billable=0 LS | rate=₹600,000.00 | gross=₹0.00
note=Milestone not completed in September 2026 or already billed.
- B02 | Supply of GI cable tray 300 mm | WBS/activity=A2020 | billable=1500 m | rate=₹1,150.00 | gross=₹1,725,000.00
note=300 m failed QC; excluded.
- B03 | Supply of CCTV pole 9 m | WBS/activity=A2030 | billable=24 nos | rate=₹38,500.00 | gross=₹924,000.00
note=2 nos failed QC; excluded.
- B04 | OFC laying including HDD crossing | WBS/activity=A3000 | A3010 | billable=4.9 km | rate=₹185,000.00 | gross=₹906,500.00
disputed=0.3 km
note=0.3 km disputed; excluded from billing.
- B05 | Cable tray installation | WBS/activity=A3020 | billable=700 m | rate=₹220.00 | gross=₹154,000.00
variation=250 m
- B06 | CCTV pole erection including foundation | WBS/activity=A3030 | billable=12 nos | rate=₹14,500.00 | gross=₹174,000.00
disputed=2 nos
note=2 nos disputed; excluded from billing.
- B07 | Testing and commissioning | WBS/activity=A4010 | billable=0 LS | rate=₹450,000.00 | gross=₹0.00
note=Milestone not completed in September 2026 or already billed.

EXCEPTIONS

- B05: 250 m certified above contract quantity; recorded as variation.

At the bottom of the task details, there are options to "Add fields", "Add subtask", "Relate items or add dependencies", "Create checklist", and "Attach file".

The right sidebar shows the "Activity" section with a comment "You created this task" dated "Sep 25 at 8:14 pm".

Evidence 04/12 • screenshots/04_ra04_task.png

KAVERI INFRA SYSTEMS

Smart Corridor Package 2 — RA-04 Bill

RA Number	RA-04	Work Month	September 2026
Project	SCP2	Reporting Date	30 September 2026

Bill Line Summary

BOO	Description	WGS / Activity	Unit	Contract Qty	Prev. Billed	Certified	Disputed	Disable	Rate	Gross
B01	Detailed engineering and design	A1010	LS	1	1	0	0	0	INR 600,000.00	INR 0.00
B02	Supply of GI cable tray 300 mm	A2020	m	4000	2400	0	0	1500	INR 1,150.00	INR 1,725,000.00
B03	Supply of CCTV pole 9 m	A2030	nos	60	30	0	0	24	INR 38,500.00	INR 924,000.00
B04	OFC laying including HDD crossing	A3000 / A3010	km	18	9.1	4.9	0.3	4.9	INR 165,000.00	INR 906,500.00
B05	Cable tray installation	A3020	m	4000	3200	950	0	700	INR 220.00	INR 154,000.00
B06	CCTV pole erection including foundation	A3030	nos	60	18	12	2	12	INR 14,500.00	INR 174,000.00
B07	Testing and commissioning	A4010	LS	1	0	0	0	0	INR 450,000.00	INR 0.00

Commercial Summary

Description	Amount
Contract Value	INR 13,040,000.00
Gross Value	INR 3,883,500.00
GST @ 18%	INR 699,030.00
Retention @ 5%	INR 194,175.00
Advance Recovery	INR 324,650.00
Net Payable	INR 4,063,705.00

Mobilisation Advance

Description	Amount
Mobilisation Advance @ 8%	INR 1,043,200.00
Previous Advance Recovered	INR 718,550.00
Outstanding Before RA-04	INR 324,650.00
RA-04 Recovery	INR 324,650.00


Exceptions and Notes

B01: Milestone not completed in September 2026 or already billed.
B02: 300 m failed QC; excluded.
B03: 2 nos failed QC; excluded.
B04: 0.3 km disputed; excluded from billing.

B05: 250 m certified above contract quantity; recorded as variation.
B06: 2 nos disputed; excluded from billing.
B07: Milestone not completed in September 2026 or already billed.

Source: controlled project data pack and SCP2 schedule. All bill calculations are generated by the RA-04 bill engine.

Evidence 05/12 • screenshots/05_ra04_pdf.png

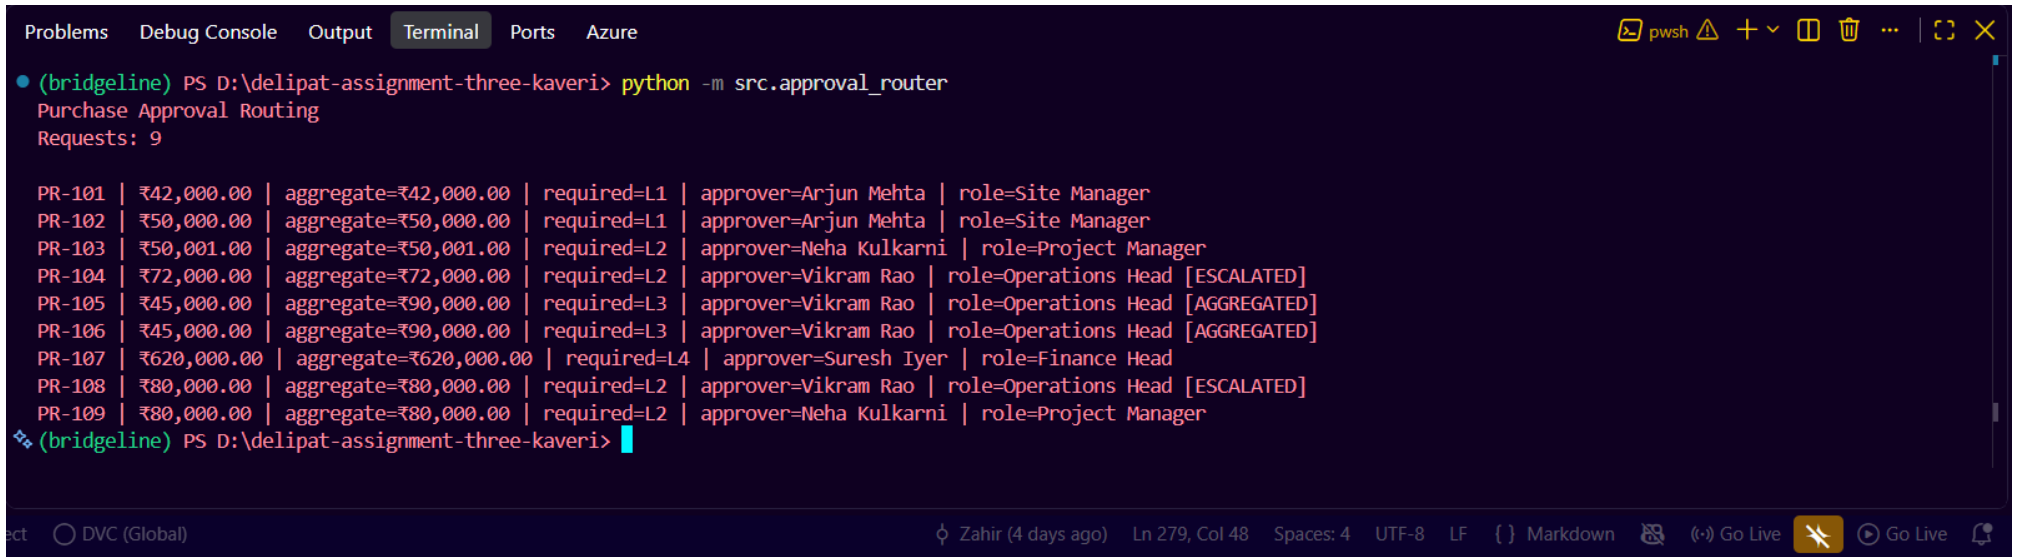

```
(bridgeline) PS D:\delipat-assignment-three-kaveri> python -m src.approval_router
Purchase Approval Routing
Requests: 9

PR-101 | ₹42,000.00 | aggregate=₹42,000.00 | required=L1 | approver=Arjun Mehta | role=Site Manager
PR-102 | ₹50,000.00 | aggregate=₹50,000.00 | required=L1 | approver=Arjun Mehta | role=Site Manager
PR-103 | ₹50,001.00 | aggregate=₹50,001.00 | required=L2 | approver=Neha Kulkarni | role=Project Manager
PR-104 | ₹72,000.00 | aggregate=₹72,000.00 | required=L2 | approver=Vikram Rao | role=Operations Head [ESCALATED]
PR-105 | ₹45,000.00 | aggregate=₹90,000.00 | required=L3 | approver=Vikram Rao | role=Operations Head [AGGREGATED]
PR-106 | ₹45,000.00 | aggregate=₹90,000.00 | required=L3 | approver=Vikram Rao | role=Operations Head [AGGREGATED]
PR-107 | ₹620,000.00 | aggregate=₹620,000.00 | required=L4 | approver=Suresh Iyer | role=Finance Head
PR-108 | ₹80,000.00 | aggregate=₹80,000.00 | required=L2 | approver=Vikram Rao | role=Operations Head [ESCALATED]
PR-109 | ₹80,000.00 | aggregate=₹80,000.00 | required=L2 | approver=Neha Kulkarni | role=Project Manager
(bridgeline) PS D:\delipat-assignment-three-kaveri>
```

Evidence 06/12 • screenshots/06_purchase_approval_router.png

```
Problems  Debug Console  Output  Terminal  Ports  Azure

(bridgeline) PS D:\delipat-assignment-three-kaveri> python -m src.cashflow_forecaster
SCP2 Cash-flow Forecast
=====

Forecast lines:
B02 | remaining=1600 | finish=2026-10 | gross=INR 1,840,000.00 | payment=2026-12-05
B03 | remaining=30 | finish=2026-10 | gross=INR 1,155,000.00 | payment=2026-12-05
B04 | remaining=8.9 | finish=2026-10 | gross=INR 1,646,500.00 | payment=2026-12-05
B05 | remaining=700 | finish=2026-10 | gross=INR 154,000.00 | payment=2026-12-05
B06 | remaining=42 | finish=2026-10 | gross=INR 609,000.00 | payment=2026-12-05
B07 | remaining=1 | finish=2026-11 | gross=INR 450,000.00 | payment=2027-01-04

Monthly cash inflow:
2026-10 | INR 2,385,500.00
2026-11 | INR 4,063,705.00
2026-12 | INR 6,107,085.00

Writing forecast to ClickUp...
ClickUp cash-flow forecast ready.
Task ID: 14ypx61y7tc
Task name: Cash-flow Forecast - Oct-Dec 2026
List ID: 1300410000043629
(bridgeline) PS D:\delipat-assignment-three-kaveri>
```

Evidence 07/12 • screenshots/07_cashflow_forecast.png

```
Problems  Debug Console  Output  Terminal  Ports  Azure
(bridgeline) PS D:\delipat-assignment-three-kaveri> python -m src.weekly_report
KAVERI INFRASTRUCTURE - WEEKLY MANAGEMENT REPORT
=====

Reporting date: 2026-09-30
Project: SCP2

1. SCHEDULE & PROGRESS
-----
Schedule validation: PASS
Activity progress: 71.08%
Completed activities: 3/12
Completed milestones: 1/2

2. RA-04 BILLING
-----
Gross value: INR 3,883,500.00
Advance recovery: INR 324,650.00
Net payable: INR 4,063,705.00
Disputed value excluded: INR 84,500.00

3. PURCHASE APPROVALS
-----
Purchase requests routed: 9
Escalated requests: 2
Anti-splitting flags: 2

4. CASH-FLOW FORECAST
-----
October 2026: INR 2,385,500.00
November 2026: INR 4,063,705.00
December 2026: INR 6,107,085.00

5. KEY EXCEPTIONS / MANAGEMENT ATTENTION
-----
- B05: 250 m certified above contract quantity; recorded as variation.
- PR-104 escalated to L2 because the assigned approver was unavailable.
- PR-105 triggered the anti-splitting aggregation rule.
- PR-106 triggered the anti-splitting aggregation rule.

SOURCE / CONTROL NOTE
-----
All numerical values are generated from controlled project data and deterministic program calculations. No external AI or external data source is used for the calculations.

6. LOCAL OLLAMA MANAGEMENT NARRATIVE
-----
The Kaveri Infrasystems SCP2 project is progressing according to schedule, with 71.08% of activities completed. The project has received INR 3,883,500.00 in gross value, with INR 4,063,705.00 payable. The project has 9 purchase requests routed, with 2 escalated and 2 flagged for anti-splitting. The cash flow forecast for October, November, and December 2026 is INR 2,385,500.00, INR 4,063,705.00, and INR 6,107,085.00, respectively.

AI attention points:
- B05: 250 m certified above contract quantity; recorded as variation.
- PR-104 escalated to L2 because the assigned approver was unavailable.
- PR-105 triggered the anti-splitting aggregation rule.
- PR-106 triggered the anti-splitting aggregation rule.
- PR-108 escalated to L2 because the assigned approver was unavailable.

AI CONTROL NOTE
-----
Narrative generated using local Ollama only. Numerical values above are produced by deterministic project-control calculations.
(bridgeline) PS D:\delipat-assignment-three-kaveri>
```

Evidence 08/12 • screenshots/08_weekly_management_report.png


```
Problems  Debug Console  Output  Terminal  Ports  Azure
(bridgeline) PS D:\delipat-assignment-three-kaveri> python -m src.ai.local_extractor
Using local Ollama: http://127.0.0.1:11434
Model: llama3
Classifying 26 execution remarks...

[01/26] EX-901 -> none, not stated
[02/26] EX-902 -> weather, 2
[03/26] EX-903 -> none, not stated
[04/26] EX-904 -> none, not stated
[05/26] EX-905 -> weather, not stated
[06/26] EX-906 -> none, not stated
[07/26] EX-907 -> none, not stated
[08/26] EX-908 -> none, not stated
[09/26] EX-909 -> none, not stated
[10/26] EX-910 -> material, not stated
[11/26] EX-911 -> weather, 2
[12/26] EX-912 -> labour, not stated
[13/26] EX-913 -> none, not stated
[14/26] EX-914 -> none, not stated
[15/26] EX-915 -> none, not stated
[16/26] EX-916 -> authority, 3
[17/26] EX-917 -> none, not stated
[18/26] EX-918 -> none, not stated
[19/26] EX-919 -> traffic, 1
[20/26] EX-920 -> none, not stated
[21/26] EX-921 -> equipment, not stated
[22/26] EX-922 -> none, not stated
[23/26] EX-923 -> none, not stated
[24/26] EX-924 -> equipment, 2
[25/26] EX-925 -> labour, not stated
[26/26] EX-926 -> authority, not stated

=== Local Ollama Accuracy ===
Delay category: 24/26 (92.31%)
Delay hours: 26/26 (100.00%)

Predictions saved to: D:\delipat-assignment-three-kaveri\data\processed\local_ollama_predictions.csv
Accuracy report saved to: D:\delipat-assignment-three-kaveri\data\processed\local_ollama_accuracy.json
(bridgeline) PS D:\delipat-assignment-three-kaveri>
```

Evidence 09/12 • screenshots/09_local_ollama_accuracy.png

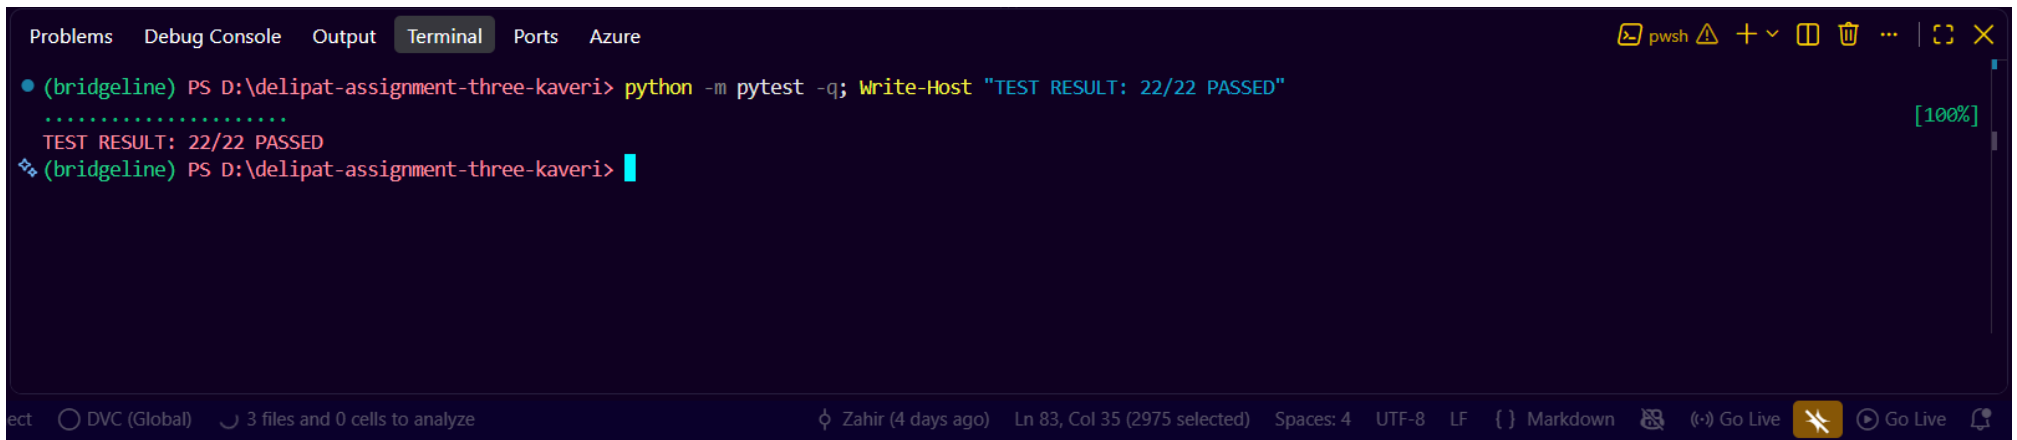

The screenshot shows a VS Code terminal window with the 'Terminal' tab selected. The terminal output shows a successful pytest run. The command executed is `python -m pytest -q; Write-Host "TEST RESULT: 22/22 PASSED"`. The output is `TEST RESULT: 22/22 PASSED`. The terminal window has a dark theme and a status bar at the bottom showing 'Ln 83, Col 35 (2975 selected)' and 'Spaces: 4 UTF-8 LF { } Markdown'.

```
(bridgeline) PS D:\delipat-assignment-three-kaveri> python -m pytest -q; Write-Host "TEST RESULT: 22/22 PASSED"
.....
TEST RESULT: 22/22 PASSED
(bridgeline) PS D:\delipat-assignment-three-kaveri>
```

Evidence 10/12 • screenshots/10_automated_tests.png

The screenshot shows a GitHub repository page for 'delipat-assignment-three-kaveri' (Public). The repository has 1 branch (main) and 0 tags. The commit history shows a recent commit by 'zahir2003' (dc45b95) 32 minutes ago, titled 'docs: add dated assignment build log'. The file list includes folders 'artifacts', 'data', 'docs', 'reports', 'src', and 'tests', and files '.env.example', '.gitignore', 'BUILD_LOG.md', 'FEASIBILITY.md', 'README.md', 'pyproject.toml', and 'requirements.txt'. The right sidebar shows the 'About' section with no description, website, or topics provided. It also lists 'Releases' (no releases published), 'Packages' (no packages published), 'Contributors' (1 contributor: zahir2003 Sk Mahiduzzaman), and 'Languages' (Python 100%).

Repository Details:

- Repository: delipat-assignment-three-kaveri (Public)
- Branches: 1 Branch (main)
- Tags: 0 Tags
- Commits: 19 Commits

File List:

File/Folder	Commit Message	Time Ago
artifacts	chore: initialize assignment three project	5 days ago
data	chore: initialize assignment three project	5 days ago
docs	chore: initialize assignment three project	5 days ago
reports	First Commit	4 days ago
src	feat: add local Ollama weekly narrative	1 hour ago
tests	feat: implement purchase approval router	2 days ago
.env.example	chore: initialize assignment three project	5 days ago
.gitignore	chore: initialize assignment three project	5 days ago
BUILD_LOG.md	docs: add dated assignment build log	32 minutes ago
FEASIBILITY.md	docs: add F1-F13 feasibility verdicts	1 hour ago
README.md	chore: initialize assignment three project	5 days ago
pyproject.toml	chore: initialize assignment three project	5 days ago
requirements.txt	chore: initialize assignment three project	5 days ago

Repository Metadata:

- About:** No description, website, or topics provided.
- Releases:** No releases published. [Create a new release](#)
- Packages:** No packages published. [Publish your first package](#)
- Contributors:** 1 contributor: zahir2003 Sk Mahiduzzaman
- Languages:** Python 100%

Evidence 11/12 • screenshots/11_github_repository.png

Feasibility Verdicts

Evidence 12/12 • screenshots/12 feasibility verdicts.png